



04 & 05 wall mount plastic loudspeakers

Package contains:


Loudspeaker	1pc.
Bracket	1pc.
Euro block connector	1pc.
Installation manual	1pc.



Drill the holes according to the drawing.
Distance between the mounting points - 45 mm.
Fix the loudspeaker bracket on the wall with fasteners suitable for your wall type.

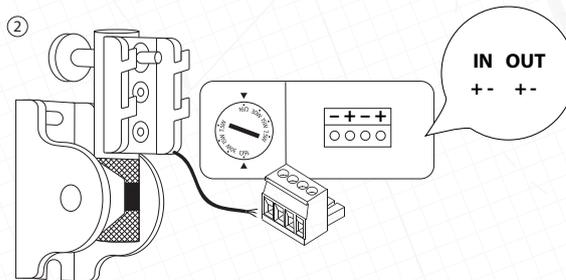


Connect the audio cable to the Euro block connector and the socket.




Set the desired loudspeaker power tap.

Please pay attention: Mount the loudspeaker on the reliable base only.
Rotate the logo horizontally or vertically depending on used the mounting position.


04 & 05 wall mount plastic loudspeakers

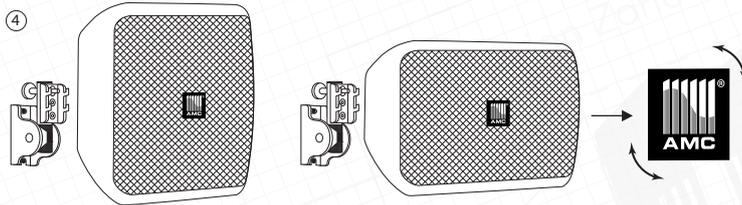

Place loudspeaker on the bracket. You can fix loudspeaker vertically or horizontally. The logo can be adjusted according to the loudspeaker's axis. To remove the bracket pull out the plunger first, then remove the loudspeaker from the bracket.

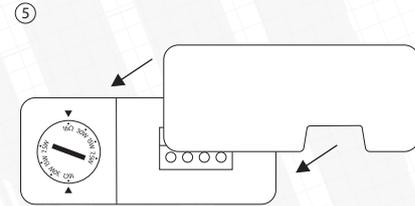


Put the plastic cover on.

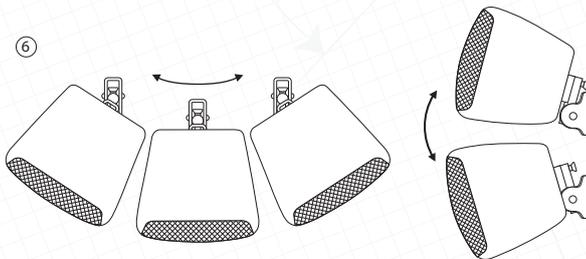

Loudspeaker's angle can be adjusted according to vertical and horizontal axis.

	Vertical Orientation	Horizontal Orientation
Tilt Angle	Max Rotation Angle	Max Rotation Angle
15°	22°	23°
0°	49°	43°
30°	39°	37°
45°	33°	36°
70°	13°	41°



Use the hexagon key to tighten bracket angle adjusting screw.