



## Assembly Guide for VESA-Bracket-D

1.

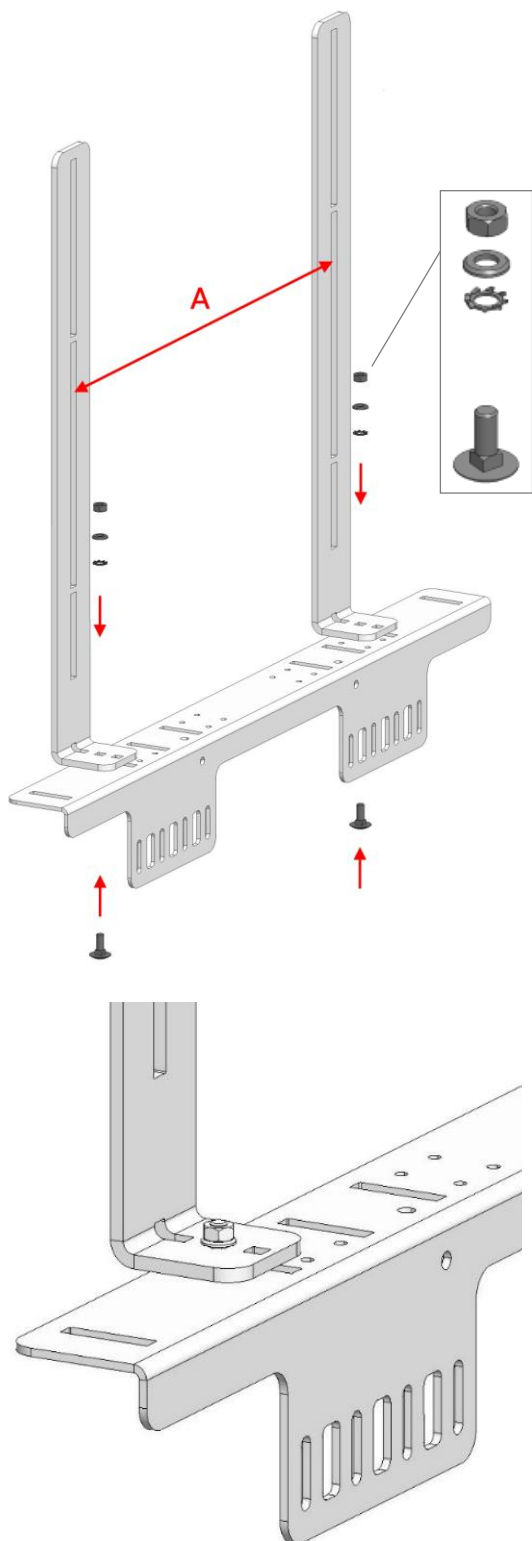


2.

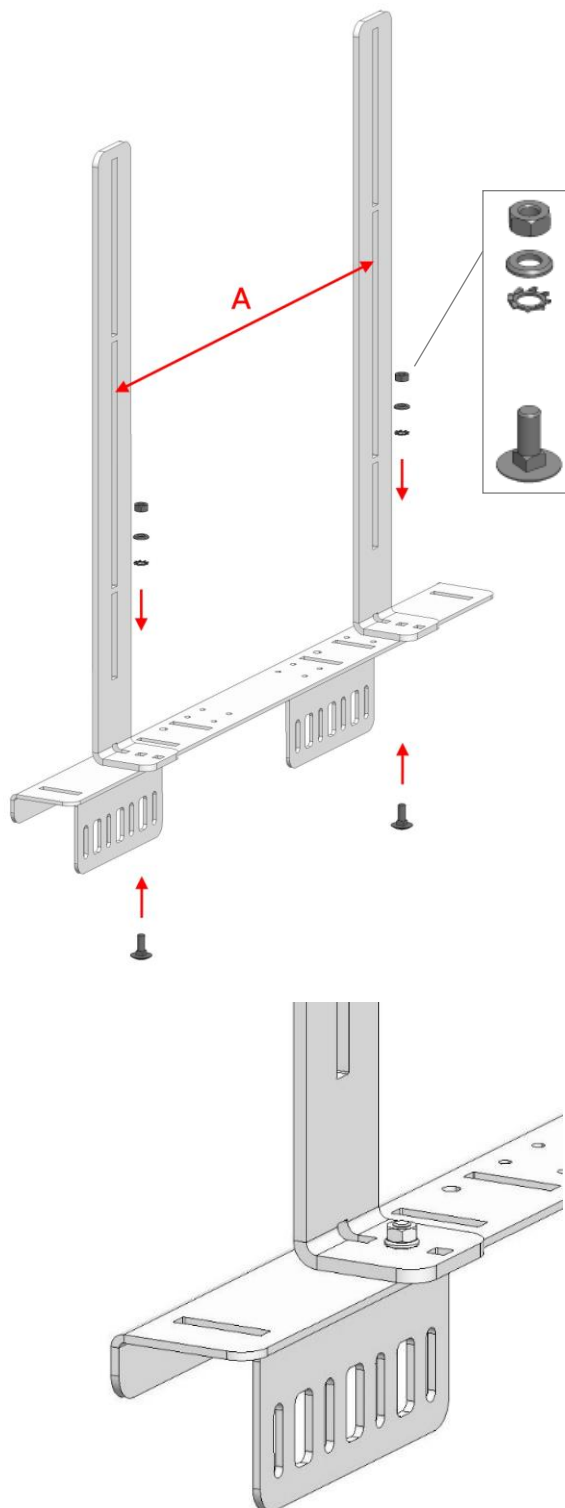


Arrange the three bracket parts according to the images in 1. or 2.  
 If depth of display is smaller than or equal to 90 mm, refer to image 1., otherwise to image 2.  
 Choose dimension "A" according to your display's VESA standard (200, 300, 400 or 600 mm).  
 Screw the parts together using carriage bolt, tooth lock washer, washer and nut.

3.

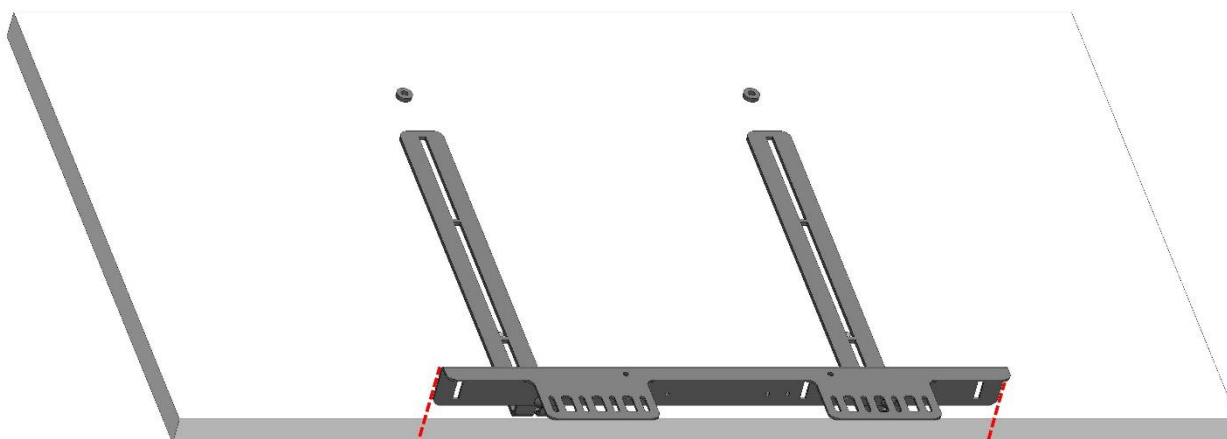

Put the VESA-Bracket-D against the rear of your display and align it with the display's outer edge as shown. For VESA threads not covered by the bracket, two 5 mm spacers are necessary.


4.

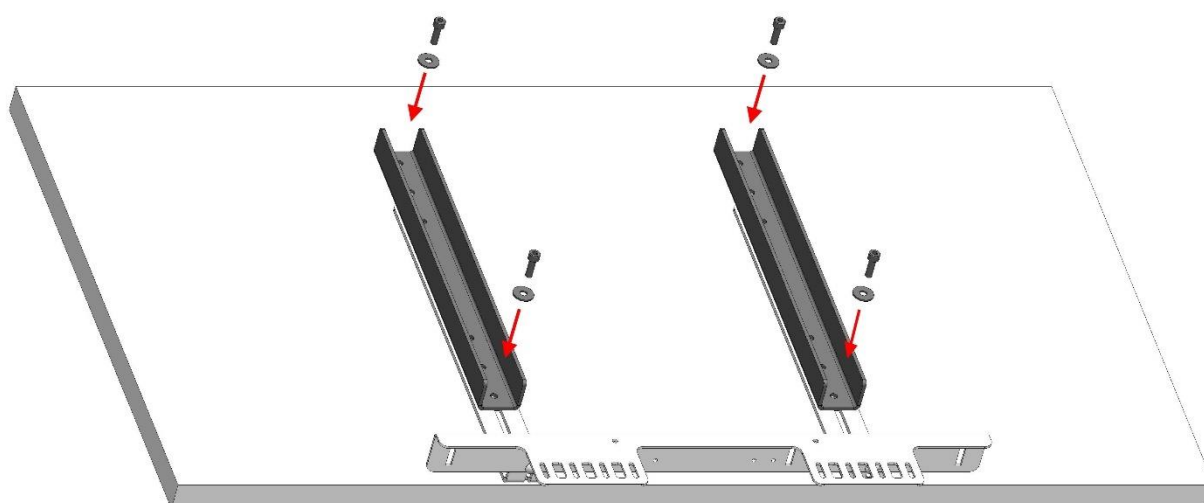

Place the VESA wall mount kit of the display on top of the VESA-Bracket-D and screw them together using Allen bolts and washers.


**⚠ Caution:** Make sure the screws are of sufficient length according to VESA standard and the display's manual and will carry the total weight.

5.

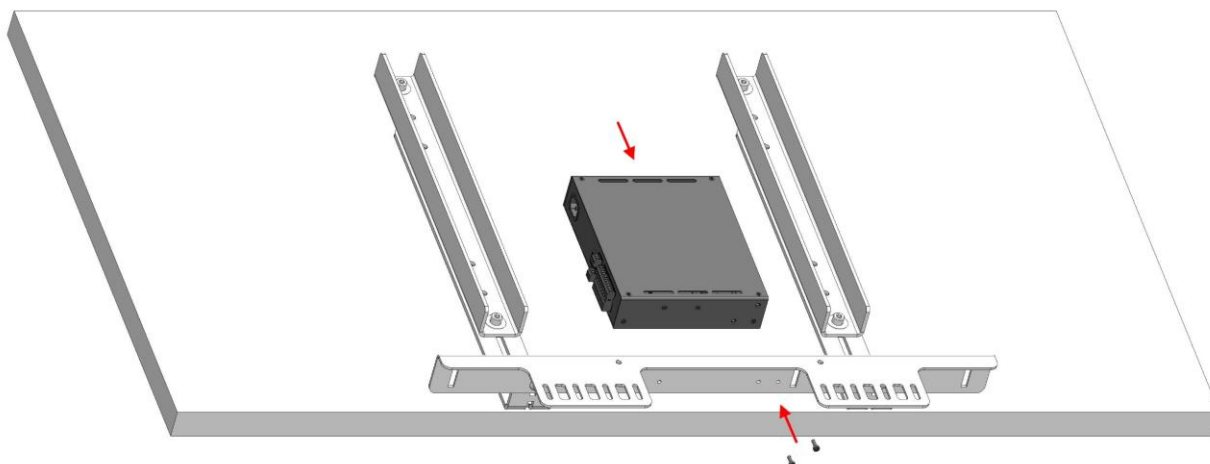


Attach a Fohhn system amplifier (e.g. MA-4.100) to the bracket.

6.

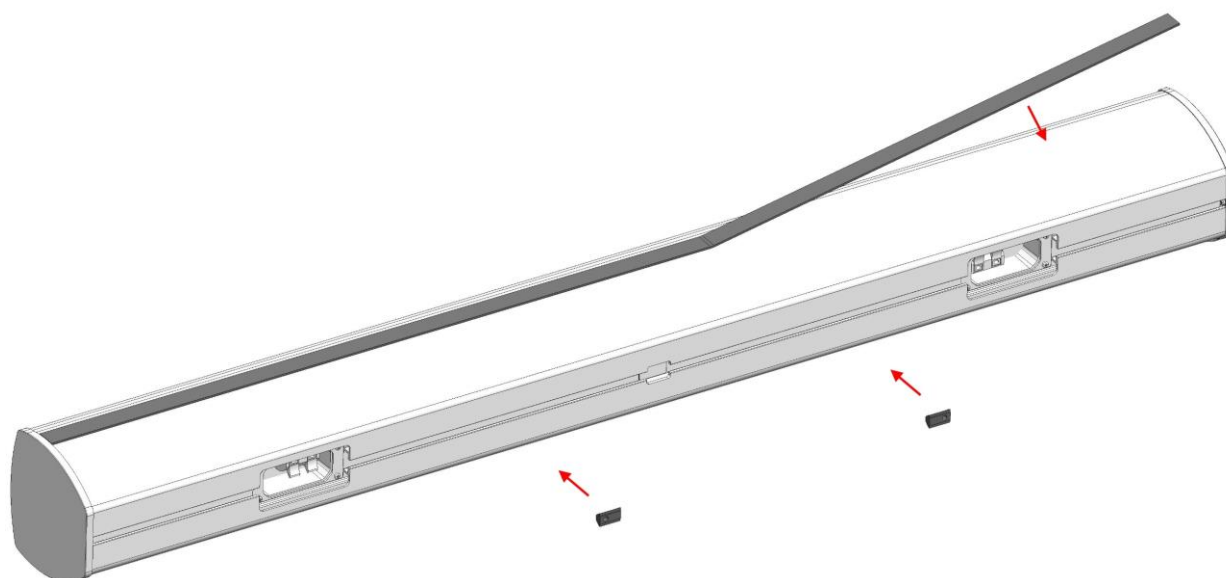


Insert two M6 slot nuts into the T-slot of the speaker.  
Attach the adhesive sealing tape to the upper side of the enclosure. Cut off the excess length.

**7.**

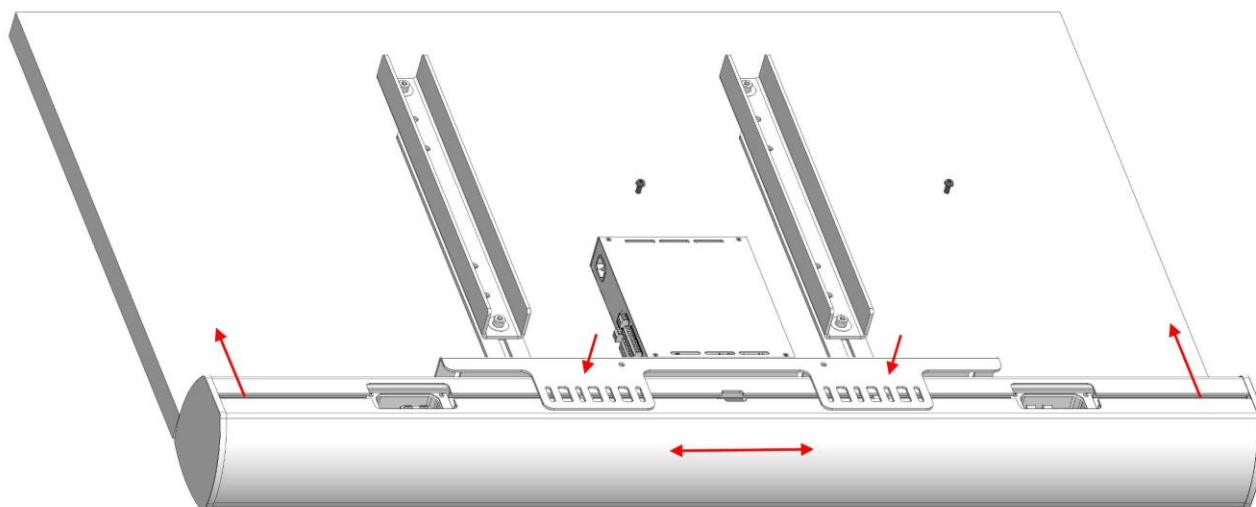

Push up the speaker against the display and align it horizontally.  
Bolt the speaker to the VESA-Bracket-D using the slot nuts and two M6 Allen bolts.

**8.**

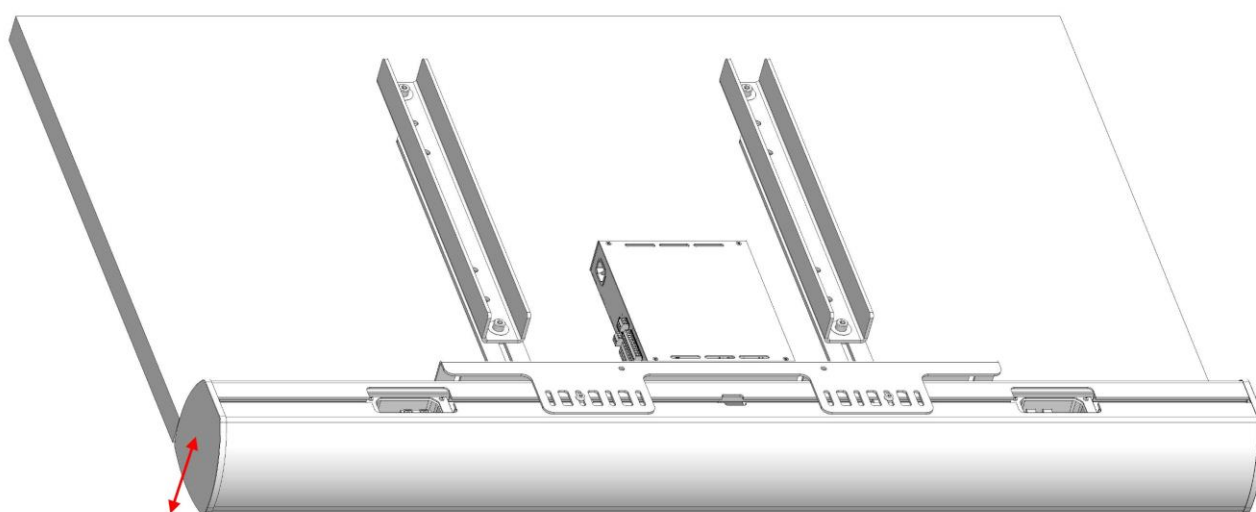

If desired, align the speaker in its depth to level with the display's screen. Please refer to 1. or 2.  
Make sure all screws and nuts are tightened correctly.