

VOLUME CONTROLS

C Series Mount Volume Controllers


C volume controllers

C5, C30 & C60


C volume controllers are designed for use in background music and voice evacuation systems, where local sound level control is required. Equipped with 10-step attenuation. Built-in 24 V internal emergency relay with internal switch for active or passive mode selection. Available for 5, 30 and 60 W power speaker line control. Only suitable for CboxD and CboxS mounting boxes (can be purchased optionally).




C30 & C60

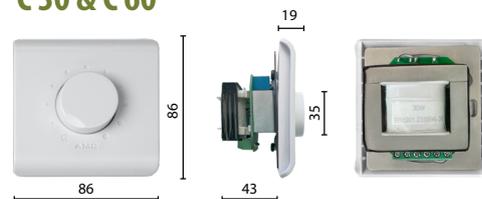

C5

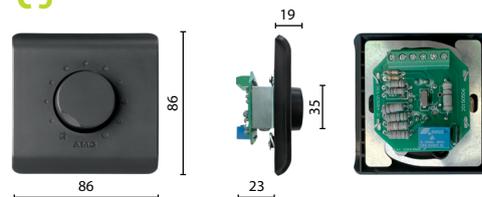

Technical Specifications	C 5	C 30	C 60
Input	5 W	30 W	60 W
Steps	10 + OFF		
Dimensions	86 x 86 mm		
Material	Plastic		
Switch modality	DC 24 V/6 Wire		
Modality	Resistor	Transformer	
Weight	0.08 kg	0.23 kg	
Emergency relay	DC 24 V		
Colour	Black (RAL 9004), White (RAL 9010)		
Optional accessories	CBoxD and CBoxS installation boxes		

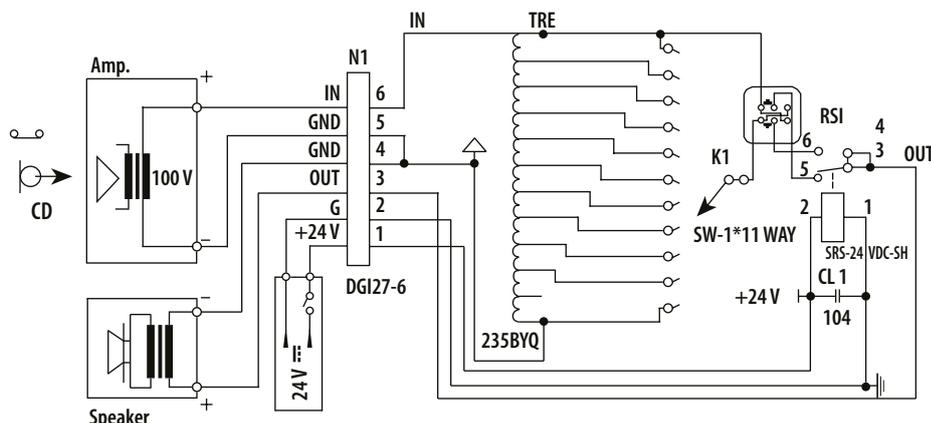

Active mode: Volume control will be fully opened and set to the maximum level until 24V DC is supplied. After DC powering, volume control will come in to operation.
 Passive mode: Volume control will be active before 24V DC will not be supplied. When DC is powered, Volume control will not be active and volume will be set to maximum level.