


SAGA


Trúa Series

Tunland series display: perfect display ratio 16:9, high protection, easy to install, being able to quickly assemble and remove the modules and power box. **Designed for reliability, it withstands extreme environmental conditions to provide a durable and long-lasting solution.**

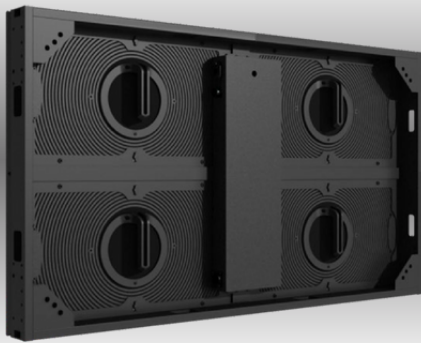


16:9 Golden Ratio

Module size: 480mm*270mm
Cabinet size: 960mm*540mm

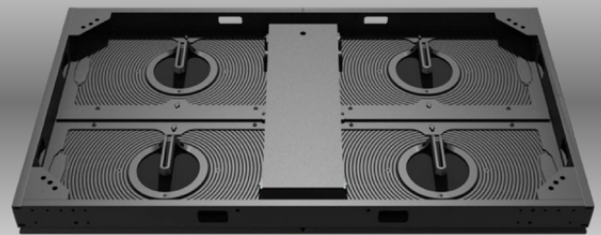

Thin & Light Weight

Weight is 11.5kg/set
Thickness is 58mm

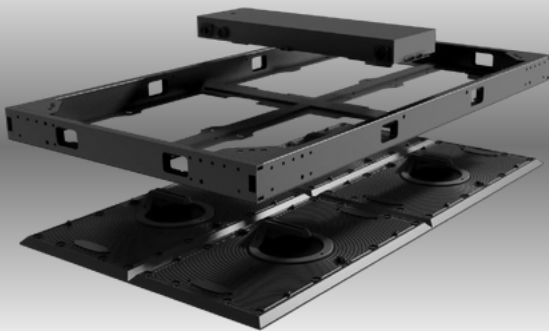

Flexible Design

The module & Power box can be removed individually




Convenient Maintenance

The module can be removed from both the front & back side

Applications



OOH Billboard

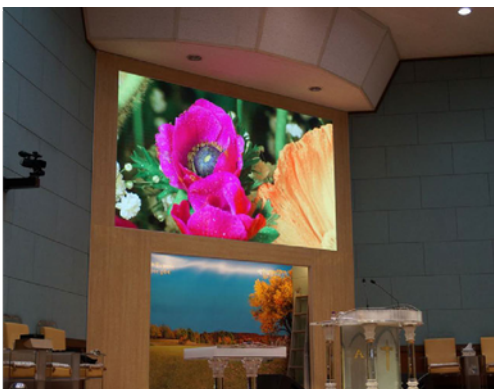

Interior Video Wall



Premise Signage

Specification

Product Series	TLI3.75	TLO3.75	TLI5	TLO5	TLO7.5
Pixel Pitch (mm)	3.75	3.75	5	5	7.5
Module Size	480*270mm	480*270mm	480*270mm	480*270mm	480*270mm
Module Resolution	128*72 pixels	128*72 pixels	96*54 pixels	96*54 pixels	64*36 pixels
Module Assembly	2X2	2X2	2X2	2X2	2X2
Panel Size	960X540mm	960X540mm	960X540mm	960X540mm	960X540mm
Panel Resolution	256*144pixels	256*144pixels	192*108pixels	192*108pixels	128*72 pixels
LED Type	SMD 2020	SMD 1921	SMD 2020	SMD 1921	SMD 2727
Brightness	1000nits	5000nits	1000nits	5500nits	5500nits
Viewing Angle(H/V)	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°
Max Power (W/m2)	560/m ²	660/m ²	560/m ²	660/m ²	660/m ²
Weight (kg/pcs)	11kg/pcs	13kg/pcs	11kg/pcs	13kg/pcs	13kg/pcs
IP (Front / Reverse)	IP42	IP65	IP42	IP65	IP65
Input Voltage (V)	100 -240V AC, 50 - 60Hz				
Operating Temperature/Humidity	-30°~ +55° / 10 ~ 80% RH				
Storage Temperature/Humidity	-40°~ +80° / 10 ~ 90% RH				